


E19 Sliding System



Used for the construction of sliding doors and windows.

The profiles are non-insulated. There is a variety of profiles with blunt and curved corners and also dedicated profiles for sliding pocket window - doors. Linear exterior surface without visible joints.

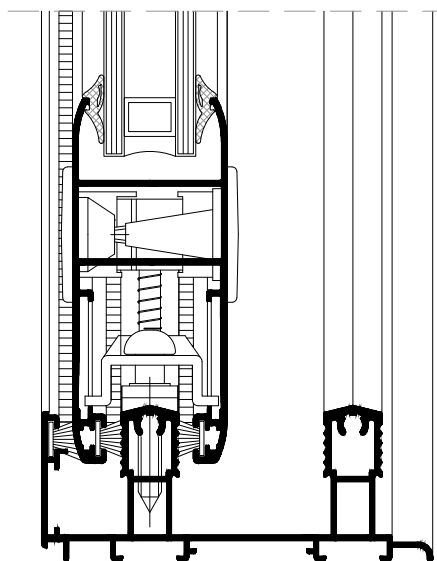

Technical features

Single & double-glazing option

Glazing infill range: 5 ÷ 19 mm

Max. sash width: 2100 mm
(height up to 1600 mm)

Max. sash height: 2300 mm
(width up to 1000 mm)

Hardware

Slide mechanism

Max. sash weight: 90 kg

Single, multiple point lock

Performance

Air Permeability: up to Class **4**

Watertightness: up to Class **8A**

Resistance to wind load: up to Class **C4**

Acoustic Performance: up to **36 dB**

Surface treatment options

RAL colours

ETEM colours

Anodising

Wood effects


Quality Standards:

- QUALICOAT
- QUALANOD
- QUALIDECO

Typologies

■ Single, double, triple & quadruple sliding with or without fly screen and shutter

■ Sliding inside a wall pocket

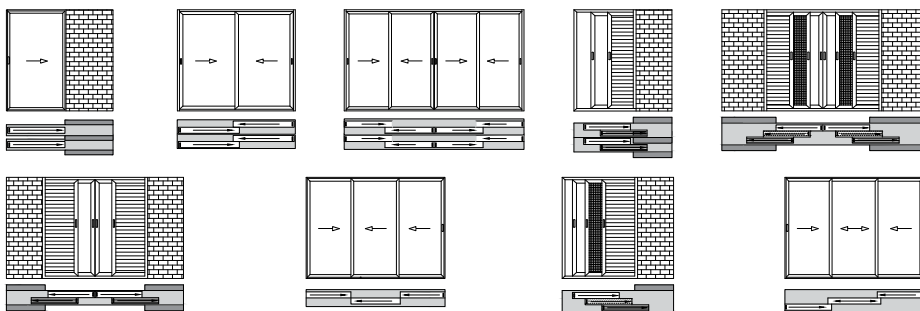

Production certificates

- EN ISO 9001
- EN ISO 14001
- OHSAS 18001

