



EB50



GLASS BALUSTRADE SYSTEM

A frameless glass balustrade system, with aluminium base without additional vertical support. It accommodates various types of infills and supports multiple anchoring methods. The base design prevents from stepping on it. It can be installed on or embedded to the floor level. Ideal for areas susceptible to overcrowding.



TECHNICAL FEATURES

Base width:	50mm
Base height:	114mm
Glazing infill range:	17,5mm / 21,5mm

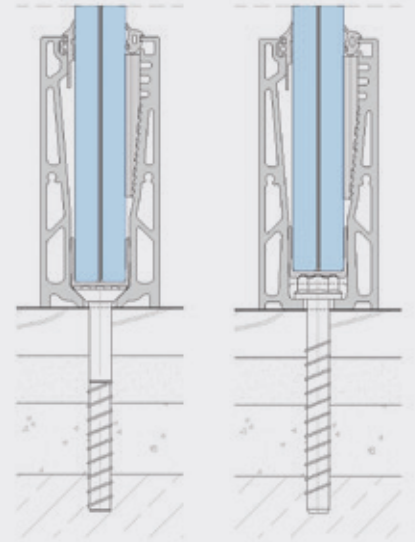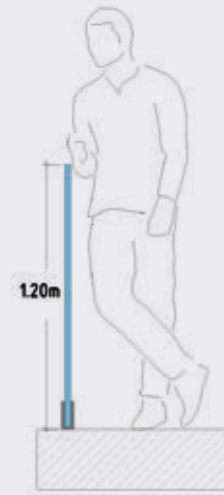


PERFORMANCE

Imposed line load at 25mm:	up to 1,6kN/m
Working line load:	up to 1,5kN/m
Horizontal static load:	up to 1,7kN/m
Dynamic impact:	up to 50kg



TYOLOGIES

- o Base E2050103 for installation with countersunk head screws
- o Base E2050104 for installation with hexagon head screws

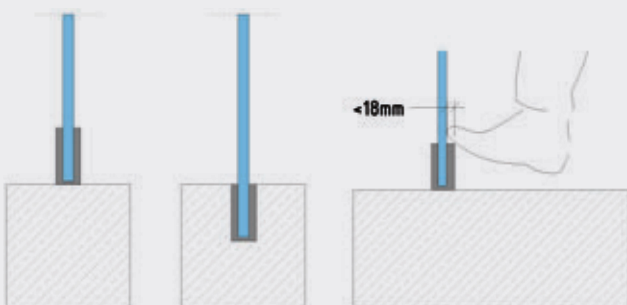

HARDWARE

Anchoring methods: screws with hexagon or countersunk head
EPDM gaskets
Two plastic wedge options

SURFACE TREATMENT

QUALICOAT - Powder coating
QUALANOD - Anodising
QUALIDECO - Wood effects